

F24 Conversion Tees

SDR9 PEX – SDR7.4 PEX

Scope of Use / Specification Sheet

SharkBite Max™ is a high-performance Push-To-Connect solution suitable for Copper and PEX applications.

SharkBite® is manufactured under our stringent and rigorous quality control to ensure every fitting and pipe meets the demands of real-world plumbing.

The system includes fittings suitable for PEX in 16mm, 20mm and 25mm sizes as well as fittings suitable for Copper in DN15, DN20 and DN25 sizes, offering robust versatility for new installations, maintenance and retrofit applications. Made for domestic and commercial water supply systems. Designed for licensed plumbers who value precision and reliability. It's a smart, stronger and faster way to get the job done.



FF364PX

Features and Benefits

- Patented technology
- Quick and easy to install in both wet and dry conditions
- No expensive tools required—no soldering, glue or joining tools
- Approved for behind the wall application
- Approved for underground installation with SharkBite® Silicone Wrap (VC870)
- Demountable, reusable and rotatable after installation
- Reinforced 304 stainless steel collar for extra strength


Product List

Order Code Description

FF364PX	16mm SDR7.4 × 16mm SDR7.4 × 16mm OD
FF372PX	20mm SDR7.4 × 20mm SDR7.4 × 20mm OD

Materials

Body	Lead Free DZR C69300
Grab Ring	316 Stainless Steel
O-Ring	EPDM
Cartridge Components	15% Glass-filled Nylon 6

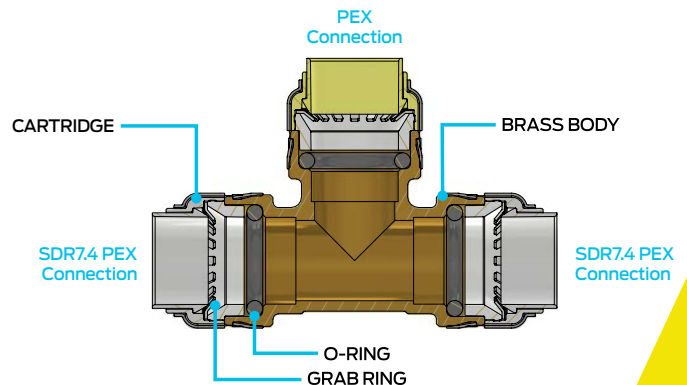

25 YEAR
GUARANTEE


All SharkBite® fittings are guaranteed against defects in materials or manufacturing for a period of 25 years from the date of purchase.

sharkbite.com.au | 1800 810 803 | sales.au@rwc.com

EPK0264 REV -

F24 Conversion Tees

SDR9 PEX – SDR7.4 PEX

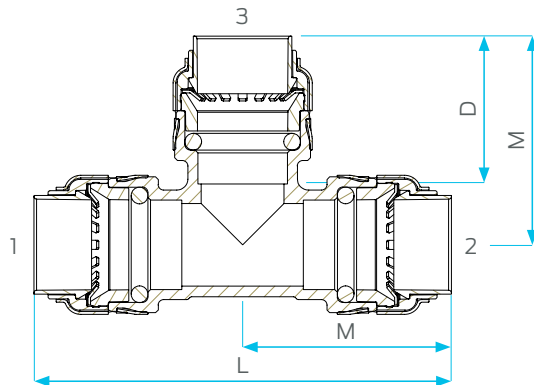

Model Dimensions

Code	1	2	3	D	L	M
FF364PX	16 OD SDR7.4	16 OD SDR7.4	16 OD SDR9	27	77	39
FF372PX	20 OD SDR 7.4	20 OD SDR 7.4	20 OD SDR9	31	90	45

Working Pressures and Temperatures

Pipe	Ambient Temp (20°C)	Max Temp (70°C)
PEX SDR9	2000kPa	1000kPa

PEX Dimensions

Nominal Outside Diameter	16mm	20mm
Average Wall Thickness	2.2	2.5
Average Internal Diameter	11.9	15.2

Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500. This product is compliant to the Lead Free requirements of the National Construction Code Volume Three. For further Scope of Use, please visit www.sharkbite.com.au/resources.

Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number or e-mail shown below for further information or to make a claim.

Visit www.sharkbite.com.au/warranty to view the warranty statement in full and for further important information.

Standards and Approvals



Lead Free
AS/NZS 2537.2
LN02056

Note: All measurements in mm unless otherwise stated.



sharkbite.com.au | 1800 810 803 | sales.au@rwc.com

Reliance Worldwide Corporation (Aust.) Pty. Ltd. reserves the right to change any product specification or information contained in this publication at any time and without notice. All diagrams are illustrative only. Please consult OEM instructions and AS/NZS 3500 for all installations. ABN 71 004 784 301 | EPK0264 REV -