

Made for Aussie Tradies.

Made for Australian job sites, SharkBite Max™ is more than just compliant. Designed and certified in compliance with AS/NZS plumbing standards, these fittings can be installed behind walls or underground, even when wet.

25 year warranty means we're with you all the way.

SPEED



Quick fix or full rough-in?

You're in and out with SharkBite Max™. Adaptable to any pipe, any job, even on wet lines. Just a quick, clean connection that seals instantly.

No expensive tools, no torches, no glue or drying time.

STRENGTH



Built for high-pressure performance, our Shark Grade stainless steel grab ring holds the pipe securely in place, delivering twice the burst pressure of our standard Push-To-Connect fitting. With a 43% boost in pressure rating—increasing from 1400kPa to 2000kPa at 95°C for copper systems. SharkBite Max™ sets a new benchmark for durability under extreme conditions.

No slipping, no stress, and no second guessing.

EASE



Tight spots? Wet lines? Underground installs? Copper or PEX? New builds or repairs?

SharkBite Max™ handles the jobs others hate with ease. **Fittings can be easily rotated or demounted after installation.**

The system that **works smarter, not harder.**

Invented by SharkBite®. Perfected with Max.

SharkBite® pioneered the Push-To-Connect revolution. With SharkBite Max™, we've taken that legacy and improved it.

- Instant Push-To-Connect connection. Cut. Push. Done.
- No expensive tools required—no soldering, glue or joining tools.
- No product waste; simply disconnect and reuse.
- Reinforced 304 stainless steel retainer for extra strength.
- Compact, robust LF DZR brass body is strong, corrosion resistant and durable.⁽¹⁾
- With a 43% boost in pressure rating—increasing from 1400kPa to 2000kPa at 95°C for copper systems.
- No PEX Liner for a cleaner and more secure fit.
- Transition fittings to Cu, SDR7.4 PEX, other SDR9 PEX and Polybutylene.
- Smart identification with depth marks on PEX pipe and colour-coded rings on fittings making identification easy.
- 25 year warranty.⁽²⁾

⁽¹⁾ Compliant with the low lead requirements specified in NSF/ANSI/CAN 372.

⁽²⁾ See our website for further information on SharkBite® warranty.

Contents of this brochure are subject to change, please visit our website for the most up-to-date product information.



☎ 1800 810 803 ✉ sales.au@rwc.com

🌐 sharkbite.com.au 📱 sharkbite.au

📷 sharkbite.au



Reliance Worldwide Corporation (Aust) Pty. Ltd.
27-28 Chapman Place Eagle Farm QLD 4009, Australia
ABN 71 004 784 301 | MNL0019 REV -



EVEN BETTER UNDER PRESSURE

2000kPa Pressure Rating on Copper



**Backed By Our
25 Year Warranty***


sharkbite.com.au

* See website for further information on SharkBite® warranty.

Adaptable by Design, SharkBite Max™ Makes Every Job Easier.

From rough-ins to repairs, SharkBite Max™ has a system that's built to work for you.

Our wide range of conversion fittings gives you more flexibility across most Australian applications.

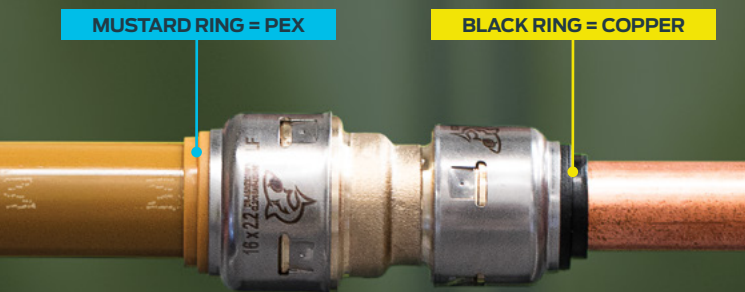

Install Smarter with SharkBite Max™

Scope of Use: Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three - The Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500.

⚠ **Products to be installed by a licensed plumber.**

PREP BEFORE YOU CUT.

- ✓ Prep it right for a perfect seal.
- ✓ Clean. Inspect. Cut square.
- ✓ Deburr copper. Mark the depth.
- ✓ Get it right before you connect.

CUT. PUSH. DONE.

- ✓ No expensive tools. No glue. No worries.
- ✓ Push the pipe into the fitting until it hits the stop.
- ✓ The Shark Grade stainless steel teeth grip the O-Ring seals.
- ✓ That's it. Locked, sealed and pressure-ready.

NEED TO ADJUST OR REMOVE?

- ✓ Easy fix. No cutting. No rework.
- ✓ Use the SharkBite® Disassembly Clip. Press, twist, and pull — you're back in control.
- ✓ Check for damage, trim pipe if needed and reconnect.

YOUR TOOL BAG JUST GOT LIGHTER

No expensive tools needed.



Tube
Cutters



Copper Deburrer
and Depth Gauge




Disassembly
Clips

How SharkBite Max™ Works. Simple. Strong. Smart.

SharkBite Max™ connects over the outside of the pipe — no tube liners needed.

That means better water flow, less restriction and stronger performance under pressure.

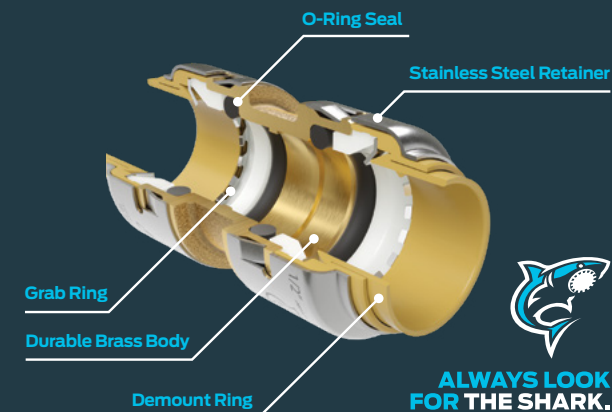

Stainless Steel Retainer—SS304

Our 304 stainless steel retainer unleashes the shark's teeth, giving you double the burst pressure of our standard fittings.

Grab Ring— SS316

Our Shark Grade 316 stainless steel teeth grip the pipe tight. It slides in easily but bites down hard, giving you a secure connection every time.

Durable Brass Body

Made from Lead Free brass that resists corrosion and stands up to tough conditions.

O-Ring Seal

A chloramine-resistant EPDM O-Ring compresses around the pipe to form a watertight seal before it hits the stop.

Demount Ring

Lets you easily remove the pipe (if needed) with the use of a SharkBite® Disassembly Clip.

Authenticity Mark

Look for the Shark on the fitting. It's your sign you've got the real SharkBite Max™.

Want to see it in action or learn more?

Visit sharkbite.com.au for more resources, guides and everything you need to get the job done right.



PEX FITTINGS

16mm

20mm

25mm

**



Lead Free

SharkBite Max™ PEX fittings and ball valves comply with and are approved to Australian standards AS/NZS 2537.2 and WMTS-012 respectively.



F1 Straight Couplings

FF008	16mm OD
FF016	20mm OD
FF020	25mm (DN25 Cu)



F1 Reducing Couplings

FF058	20mm OD × 16mm OD
FF060	25mm (DN25 Cu) × 20mm OD



F2 Straight Female Connectors

FF068	16mm OD × ¾" FI
FF072	16mm OD × ½" FI
FF088	20mm OD × ¾" FI
FF094	25mm (DN25 Cu) × 1" FI



F3 Straight Male Connectors

FF116	16mm OD × ¾" MI
FF120	16mm OD × ½" MI
FF134	20mm OD × ¾" MI
FF138	20mm OD × ½" MI
FF140	25mm (DN25 Cu) × 1" MI
FF142	25mm (DN25 Cu) × ¾" MI



PEX Flare Adaptors

FF610	16mm OD × ½" M Flare
FF612	20mm OD × ¾" M Flare



F24 Equal Tees

FF362	16mm OD
FF370	20mm OD
FF374	25mm (DN25 Cu)



F25, F26, F27 Unequal Tees

FF412	20mm OD × 20mm OD × 16mm OD
FF416	25mm (DN25 Cu) × 25mm (DN25 Cu) × 20mm OD
FF444	20mm OD × 16mm OD × 20mm OD
FF454	20mm OD × 16mm OD × 16mm OD



F12 Elbows

FF248	16mm OD
FF256	20mm OD
FF260	25mm (DN25 Cu)



F13 Male Elbows

FF280	16mm OD × ½" MI
FF286	20mm OD × ¾" MI



F14 Female Elbows

FF308	16mm OD × ½" FI
FF314	20mm OD × ¾" FI



F15BP Female Backplated Elbows

FF334	16mm OD × ½" FI
FF340	20mm OD × ¾" FI



F19BP Male Backplated Elbows

FF350	16mm OD × ½" MI, 75mm
FF351	16mm OD × ½" MI, 185mm
FF352	16mm OD × ½" MI, 100mm
FF354	20mm OD × ¾" MI, 185mm
FF356	20mm OD × ½" MI, 100mm
FF358	20mm OD × ½" MI, 200mm



Top-Plated Male Elbows

FF336	16mm OD × ½" MI, 100mm
FF336-230	16mm OD × ½" MI, 230mm



F61 Stop Ends

FF514	16mm OD
FF518	20mm OD
FF520	25mm (DN25 Cu)



DR Ball Valves PEX

FF670	16mm OD
FF672	20mm OD
FF674	25mm (DN25 Cu)



DR Ball Valves PEX/Female

FF680	16mm OD × ½" FI
FF682	20mm OD × ¾" FI
FF684	25mm (DN25 Cu) × 1" FI



Manifolds

FF690-3T	20mm PEX × 3 Way (16mm Take Offs) × 20mm PEX
FF690-4T	20mm PEX × 4 Way (16mm Take Offs) × 20mm PEX

COPPER FITTINGS

DN 15

DN 20

25mm

** SharkBite Max™ 25mm OD PEX connections can also be used for copper (DN25 Cu)



Lead Free

SharkBite Max™ Copper fittings and ball valves comply with and are approved to Australian standards AS 3688 and WMTS-012 respectively.



No.1 Straight Couplings

FC008	DN15 Cu
FC016	DN20 Cu
FF020	25mm (DN25 Cu)



No.1R Reducing Coupling

FC058	DN20 Cu × DN15 Cu
-------	-------------------



No.2 Female Connectors

FC072	DN15 Cu × ½" FI
FC088	DN20 Cu × ¾" FI
FF094	25mm (DN25 Cu) × 1" FI



No.3 Male Connectors

FC120	DN15 Cu × ½" MI
FC134	DN20 Cu × ¾" MI
FF140	25mm (DN25 Cu) × 1" MI
FF142	25mm (DN25 Cu) × ¾" MI



Hot Water Elbow

FC380	DN15 Cu × ¾" MI
-------	-----------------



No.12 Elbows

FC248	DN15 Cu
FC256	DN20 Cu
FF260	25mm (DN25 Cu)



No.15BP Female Lugged Elbows

FC334	DN15 Cu × ½" FI
FC340	DN20 Cu × ¾" FI



No.19BP Male Lugged Elbows

FC350	DN15 Cu × ½" MI, 75mm
FC352	DN20 Cu × ¾" MI, 100mm



No.24 Equal Tees

FC362	DN15 Cu
FC370	DN20 Cu
FF374	25mm (DN25 Cu)



No.25 Unequal Tee

FC412	DN20 Cu × DN20 Cu × DN15 Cu
-------	-----------------------------



No.61 Stop Ends

FC514	DN15 Cu
FC518	DN20 Cu
FF520	25mm (DN25 Cu)



Slip Couplings

FC3008	DN15 Cu
FC3016	DN20 Cu



Ball Valves

FC670	DN15 Cu
FC672	DN20 Cu
FF674	25mm (DN25 Cu)
FC682	DN20 Cu × ¾" FI
FF684	25mm (DN25 Cu) × 1" FI
FC683	DN20 Cu × ¾" MI

CONVERSION FITTINGS - PEX TO COPPER

CONVERSION FITTINGS - PEX



Lead Free

SharkBite Max™ PEX to Copper fittings comply with and are approved to Australian standards AS/NZS 2537.2 and AS 3688.



F1 Conversion Couplings
SharkBite® SDR9 PEX to Copper

FF009	16mm OD × DN15 Cu
FF017	20mm OD × DN20 Cu



F12 Conversion Elbows
SharkBite® SDR9 PEX to Copper

FF250	16mm OD × DN15 Cu
FF258	20mm OD × DN20 Cu



F24 Conversion Tees***
SharkBite® SDR9 PEX to Copper

FF363	16mm OD × Cu Centre DN15 Cu
FF371	20mm OD × Cu Centre DN20 Cu
FF364	16mm OD × PEX Centre DN15 Cu
FF372	20mm OD × PEX Centre DN20 Cu



Lead Free

SharkBite Max™ PEX Conversion fittings comply with and are approved to Australian standards AS/NZS 2537.2.



F1 Conversion Couplings
SharkBite® SDR9 PEX to SDR7.4 PEX

FF009PX	16mm OD × 16mm SDR7.4
FF017PX	20mm OD × 20mm SDR7.4



F1 Conversion Couplings
SharkBite® SDR9 PEX to Polybutylene

FF009PB	16mm OD × 18mm PB
FF017PB	20mm OD × 22mm PB



F1 Conversion Couplings
SharkBite® SDR9 PEX to SDR9 PEX

FF009AP	16mm OD × 16mm SDR9
FF017AP	20mm OD × 20mm SDR9



F24 Conversion Tees
SharkBite® SDR9 PEX (centre) to SDR7.4 PEX

FF364PX	16mm OD × 16mm SDR7.4
FF372PX	20mm OD × 20mm SDR7.4



F24 Conversion Tees
SharkBite® SDR9 PEX (centre) to Polybutylene

FF364PB	16mm OD × 18mm PB
FF372PB	20mm OD × 22mm PB

***Copper must comply to AS 1432

Note: PEX Conversion fittings are NOT suitable for connection on aluminium multi-layer PEX systems

PEX PIPE



Potable Water (Mustard)

XF860	16mm OD × 5m Straight Length
XF864	16mm OD × 50m Coil
XF864100	16mm OD × 100m Coil
XF870	20mm OD × 5m Straight Length
XF874	20mm OD × 50m Coil
XF874100	20mm OD × 100m Coil
XF880	25mm OD × 5m Straight Length
XF882	25mm OD × 25m Coil



Hot Water (Red)

XF860R	16mm OD × 5m Straight Length
XF864R	16mm OD × 50m Coil
XF870R	20mm OD × 5m Straight Length
XF874R	20mm OD × 50m Coil
XF880R	25mm OD × 5m Straight Length
XF882R	25mm OD × 25m Coil



Recycled Water (Purple)

XF862L	16mm OD × 25m Coil
XF870L	20mm OD × 5m Straight Length
XF872L	20mm OD × 25m Coil
XF882L	25mm OD × 25m Coil



Rain Water (Green)

XF860G	16mm OD × 5m Straight Length
XF862G	16mm OD × 25m Coil
XF870G	20mm OD × 5m Straight Length
XF872G	20mm × 25m Coil
XF880G	25mm OD × 5m Straight Length
XF882G	25mm OD × 25m Coil



Pipe in Conduit (Mustard only)

XF863	16mm OD × 25m Coil
XF873	20mm OD × 25m Coil



Pre-Insulated PEX Pipe 25mm Coils (Red only)

XF862RR3	16mm pre-insulated PEX R0.3
XF872RR3	20mm pre-insulated PEX R0.3
XF882RR3	25mm pre-insulated PEX R0.3
XF862RR8	16mm pre-insulated PEX R0.8
XF872RR8	20mm pre-insulated PEX R0.8
XF882RR8	25mm pre-insulated PEX R0.8

Corrugated Sleeve (Conduit only)

VC875	23mm ID × 25m Coil (Suits 16mm and 20mm PEX)
VC876	29mm ID × 25m Coil (Suits 25mm PEX)

TOOLS AND ACCESSORIES



Tube Clips

F820	16mm OD Timber Nail
F830	20mm OD Timber Nail
F850	25mm OD Timber Nail
F822	16mm OD Masonry Nail
F832	20mm OD Masonry Nail
F852	25mm OD Masonry Nail
F824	16mm OD Tek Screw
F834	20mm OD Tek Screw
F854	25mm OD Tek Screw
F826	16mm OD Concrete Anchor
F836	20mm OD Concrete Anchor
F828	16mm OD Metal Stud
F838	20mm OD Metal Stud



Tube Cutters

F701	16mm OD to 25mm OD
------	--------------------



Tube Bend Supports

F840	16mm
F842	20mm
F844	25mm



Chasing Sleeve

VC877	16mm and 20mm × 200m Coil (50mm Sleeve Width)
-------	---



Disassembly Clips

RA710	DN15 Cu Only
F710	16mm PEX Only
F712	20mm PEX and Cu
RA712	20mm PEX and Cu



RWC Silicone Burial Wrap

VC870	50mm × 3m (Self-adhesive)
-------	---------------------------



Copper Deburrers and Depth Gauges

F702	DN15, DN20, DN25
------	------------------